




鋁箔銅網編織隔離電纜

功能特性

導體使用鍍錫軟銅線絞
 半硬質PVC絕緣
 芯線集合後鋁箔麥拉帶隔離
 鍍錫軟銅地線
 鍍錫銅網編織，遮蔽率85%
 電腦傳輸電纜，PVC被覆
 定額溫度80° C，定額電壓300V
 可通過VW-ISC垂直耐燃測試

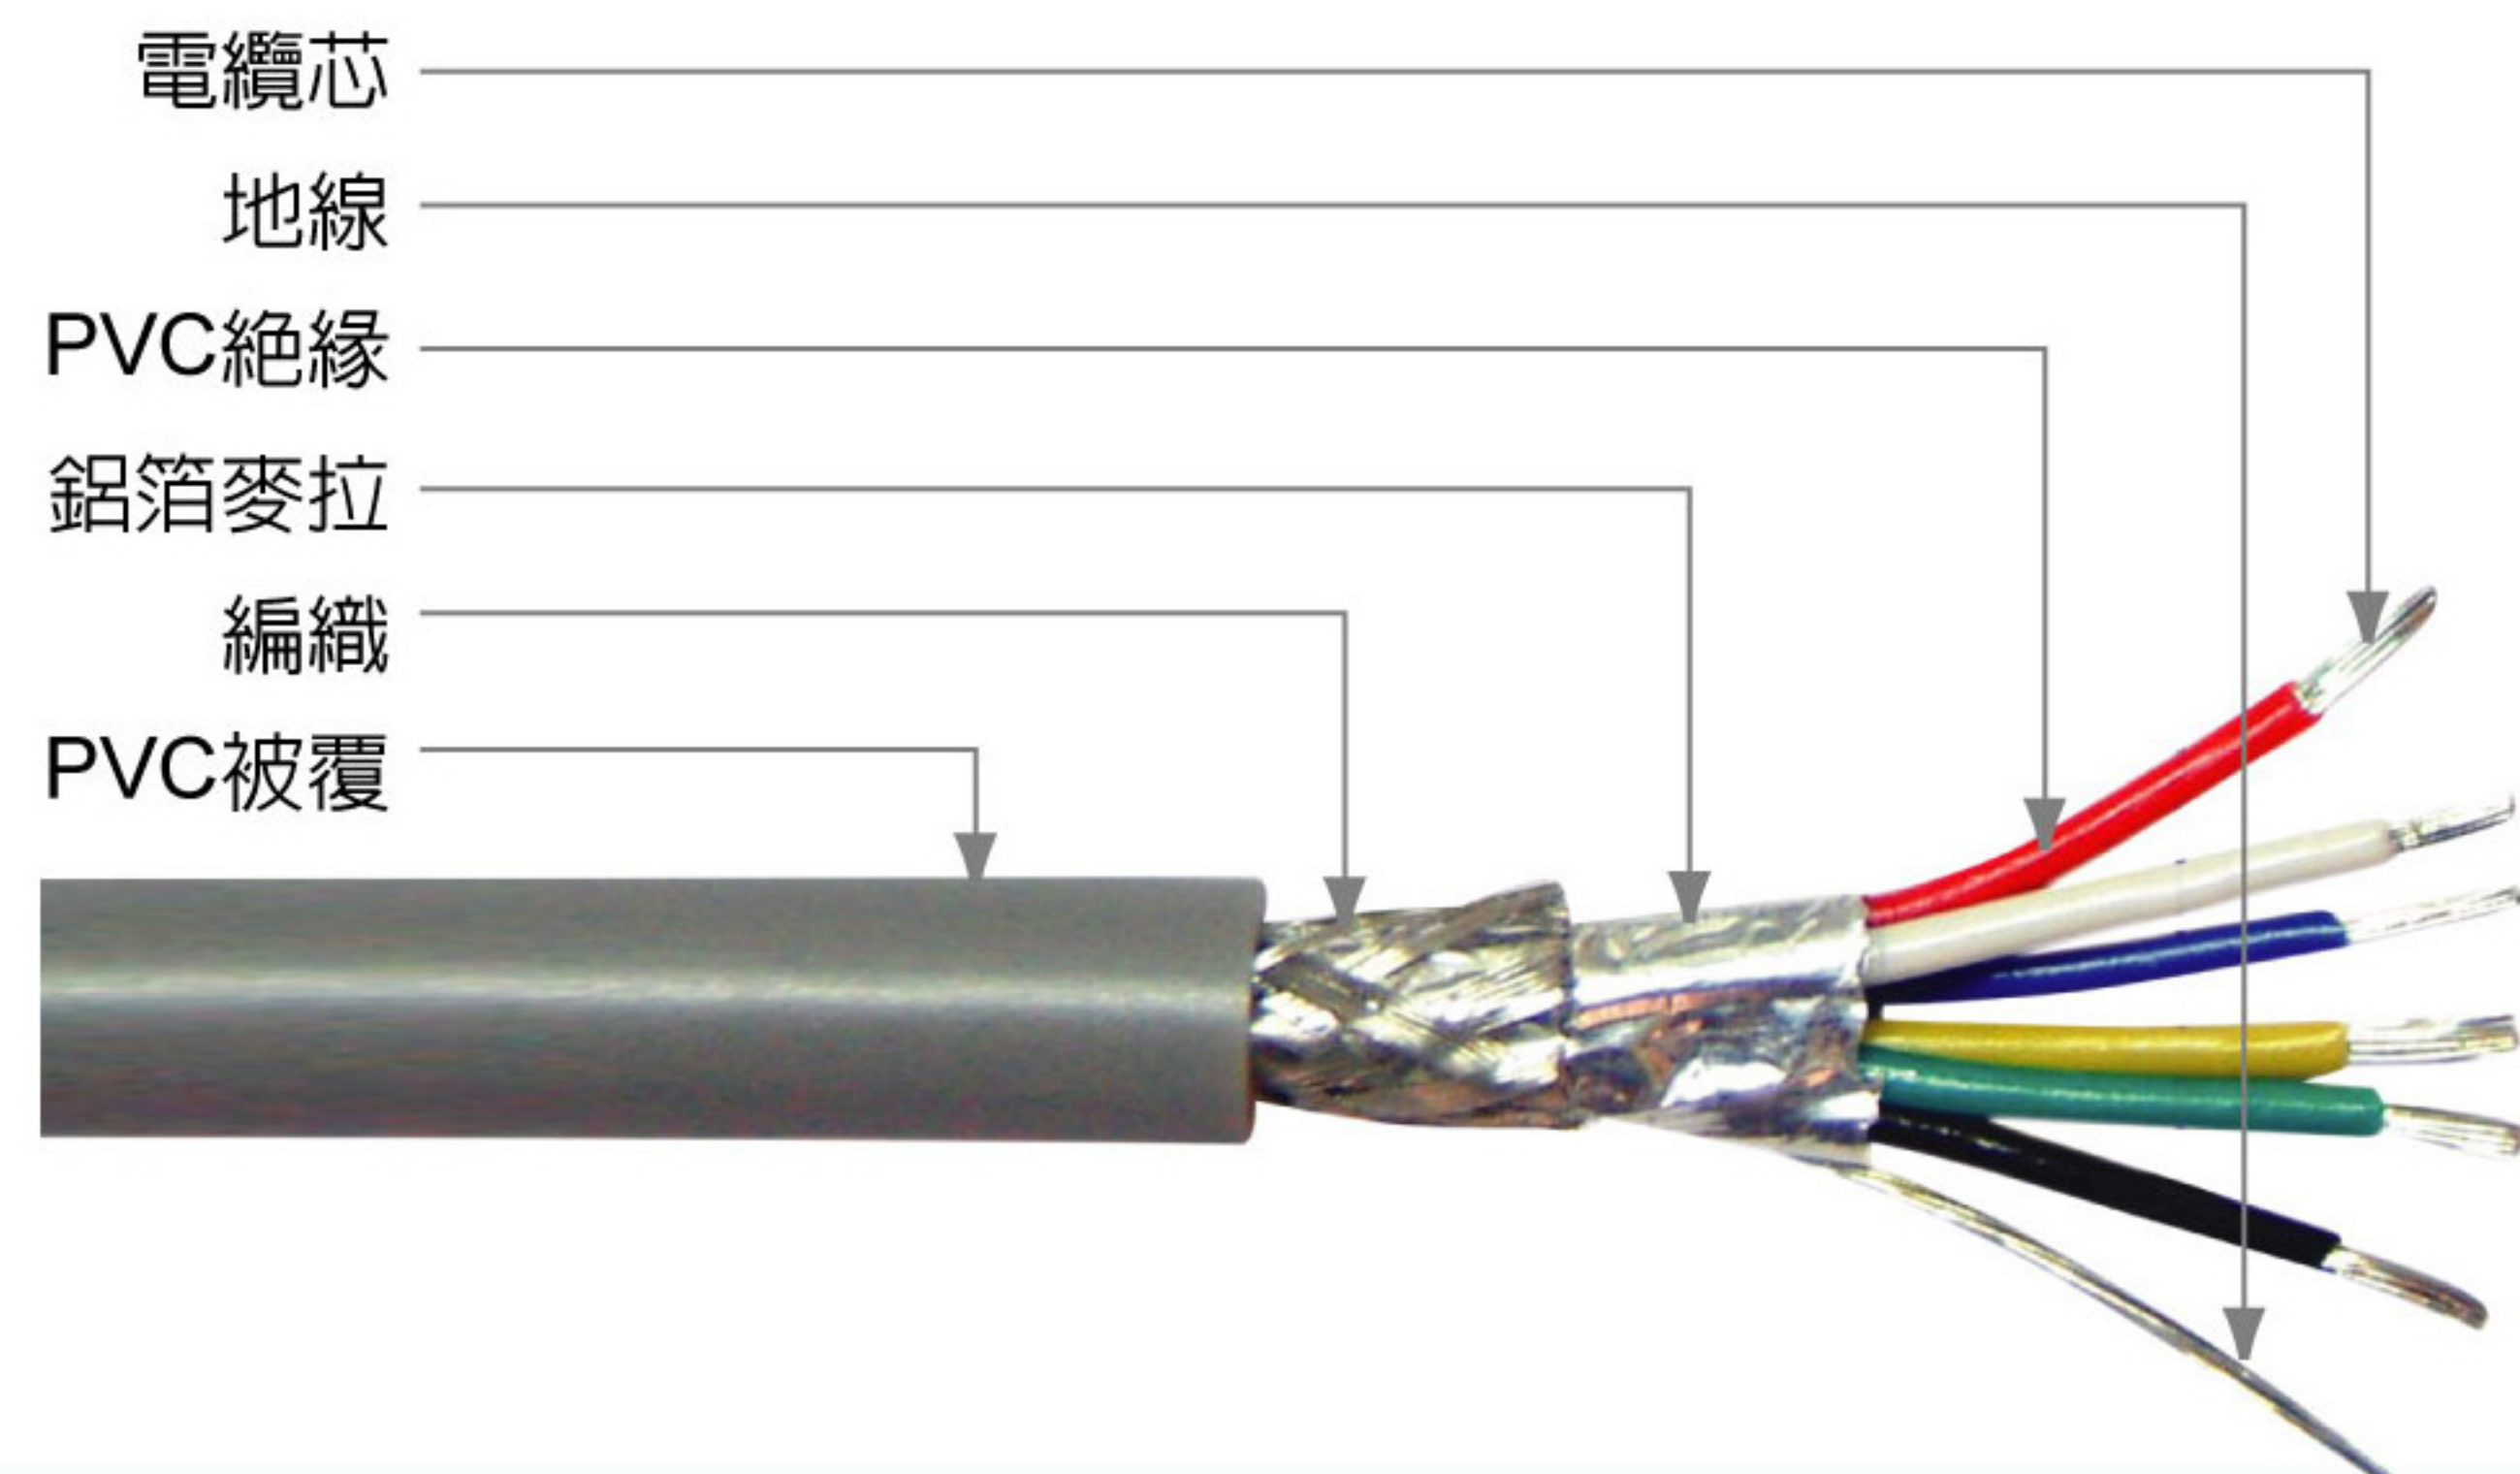

規格說明

導體		芯線數	絕緣厚度 mm	編織隔離 No. / mm	被覆厚度 mm	完成外徑 mm
線號 AWG	線數 / 線徑 No. / mm					
22	7 / 0.254	2	0.25	16 / 5 / 0.127	0.80	5.3 ± 0.15
		4	0.25	16 / 5 / 0.127	0.80	5.6 ± 0.15
		5	0.25	16 / 5 / 0.127	0.80	6.1 ± 0.15
		6	0.25	16 / 5 / 0.127	0.80	6.3 ± 0.15
		7	0.25	16 / 5 / 0.127	0.85	6.3 ± 0.15
		8	0.25	16 / 5 / 0.127	0.85	6.9 ± 0.15
		9	0.25	24 / 8 / 0.127	0.85	7.3 ± 0.25
		10	0.25	24 / 8 / 0.127	0.85	7.4 ± 0.25
		15	0.25	24 / 8 / 0.127	0.85	8.3 ± 0.25
		25	0.25	24 / 8 / 0.127	1.00	10.6 ± 0.25
		37	0.25	24 / 10 / 0.127	1.00	11.9 ± 0.30
50	0.25	24 / 10 / 0.127	1.00	13.5 ± 0.30		
24	7 / 0.203	2	0.25	16 / 5 / 0.127	0.80	4.7 ± 0.15
		4	0.25	16 / 5 / 0.127	0.80	5.1 ± 0.15
		5	0.25	16 / 5 / 0.127	0.80	5.6 ± 0.15
		6	0.25	16 / 5 / 0.127	0.80	5.7 ± 0.15
		7	0.25	16 / 5 / 0.127	0.80	5.7 ± 0.15
		8	0.25	16 / 5 / 0.127	0.80	6.2 ± 0.15
		9	0.25	16 / 5 / 0.127	0.85	6.4 ± 0.15
		10	0.25	16 / 5 / 0.127	0.85	6.7 ± 0.20
		15	0.25	16 / 5 / 0.127	0.85	7.4 ± 0.25
		25	0.25	16 / 5 / 0.127	1.00	9.1 ± 0.25
		37	0.25	16 / 5 / 0.127	1.00	10.3 ± 0.30
50	0.25	24 / 10 / 0.127	1.00	11.9 ± 0.30		